

Driver installation guide


PCSLOGO!-USB
Industrial USB adapter

. PCSLOGO!-USB Driver installation

Plugging in a PCSLOGO!-USB device into the target PC should result in Windows launching the Add New Hardware wizard (below). If it does not, then PCSLOGO!-USB drivers are probably already installed on the target P.C. The following shows the installation procedure for Windows XP. Other Windows versions have a similar installation procedure. For first time that connects PCSLOGO!-USB to USB port, found new hardware message is illustrate.

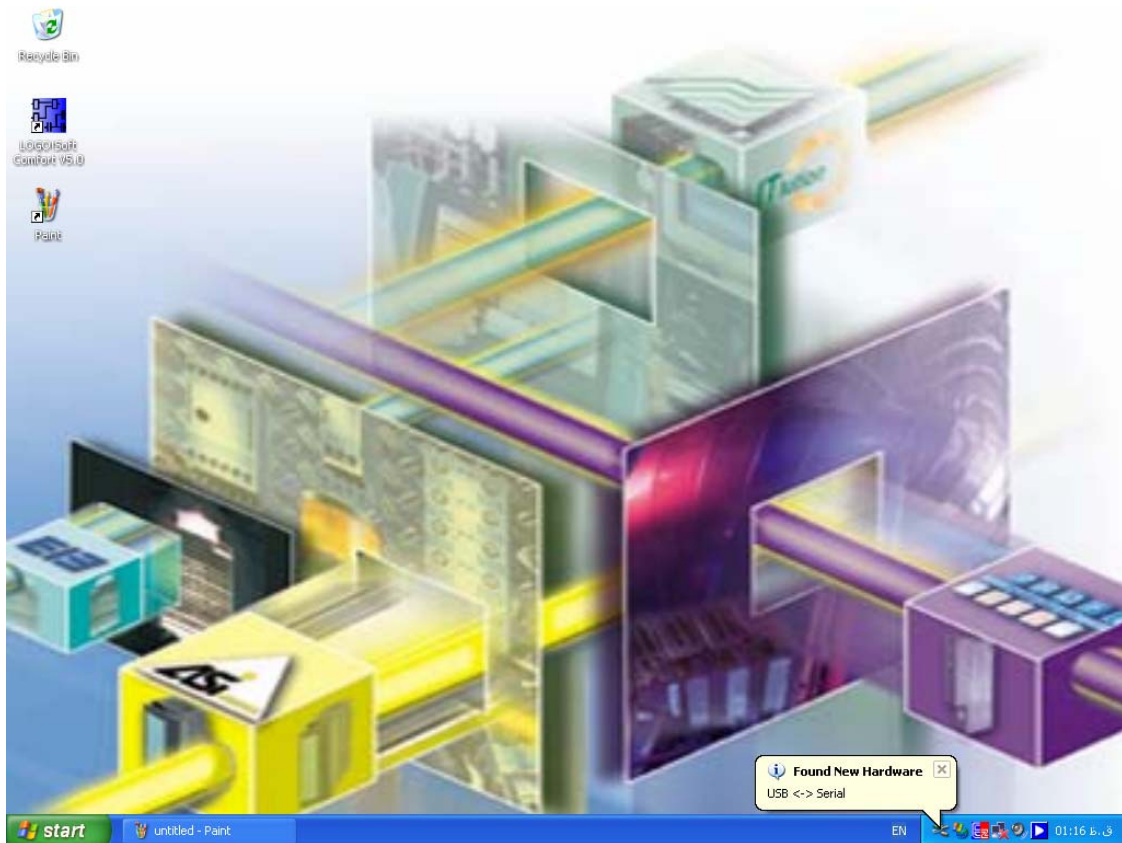


Then select install from a or specific location (Advanced) and click next

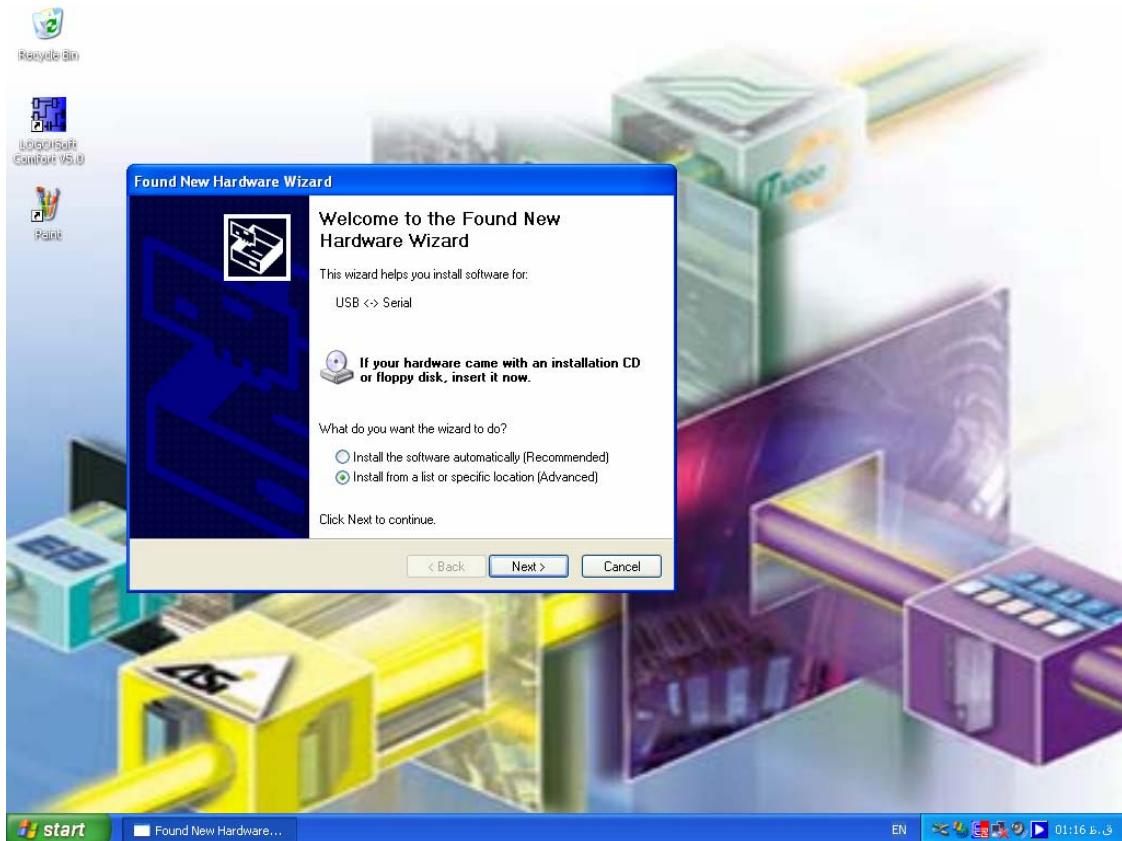


Select search for the best driver in these locations and select include this location in the search (select locations with Browse) then click next.


S

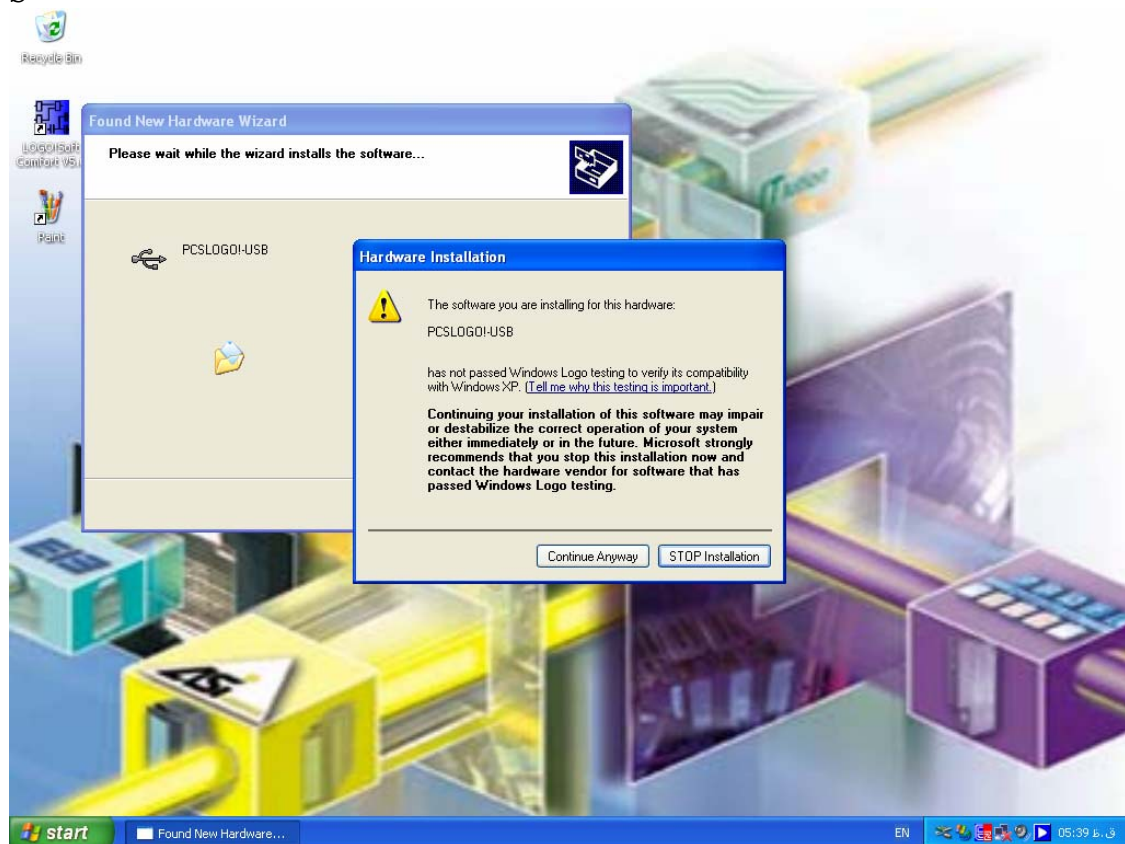


If follow window illustrate click on continue anyway.

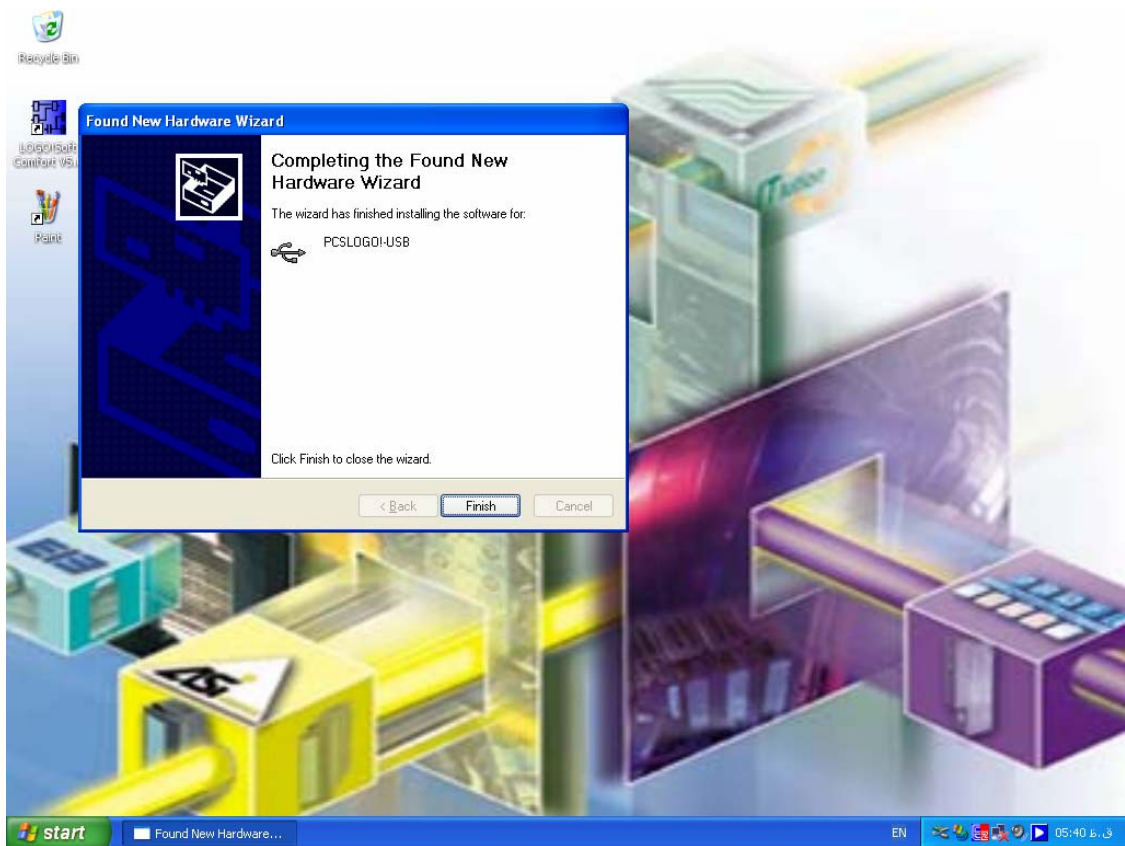


Click finish.

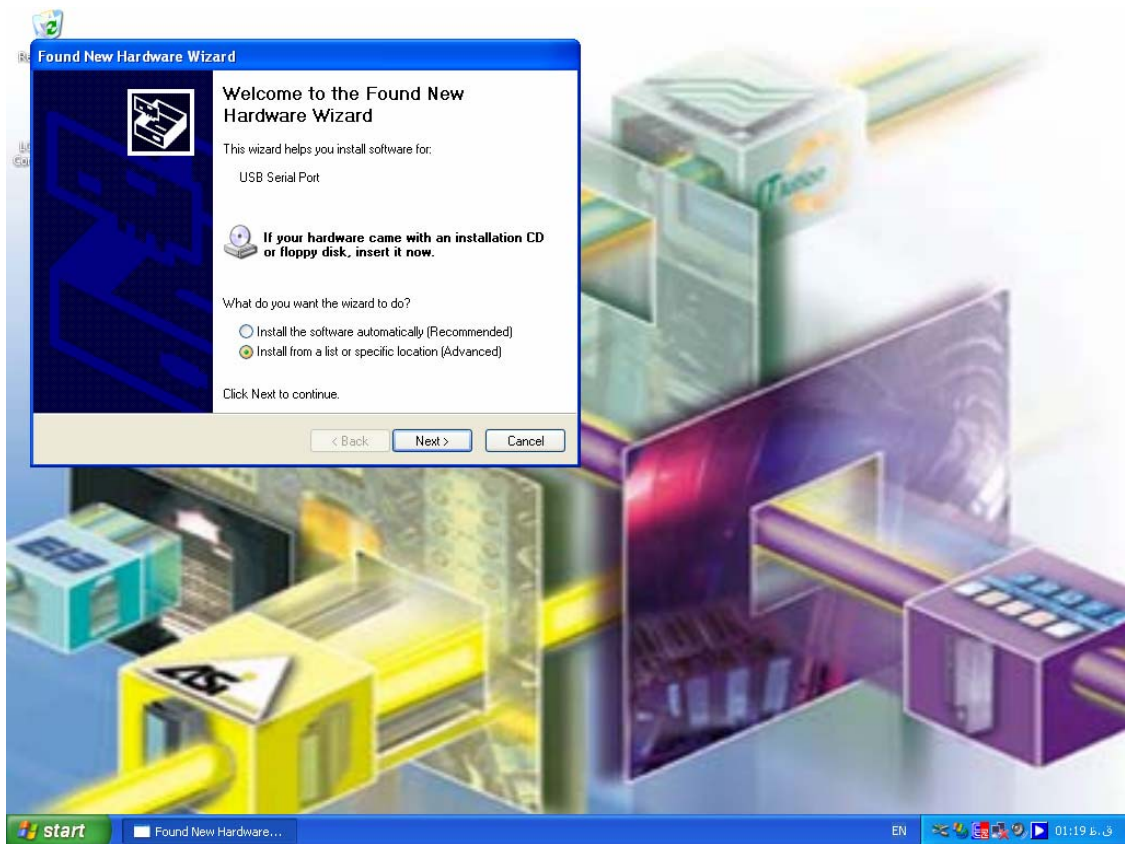


Do previous steps again to complete installation.
Select install from a or specific location (Advanced) and click next

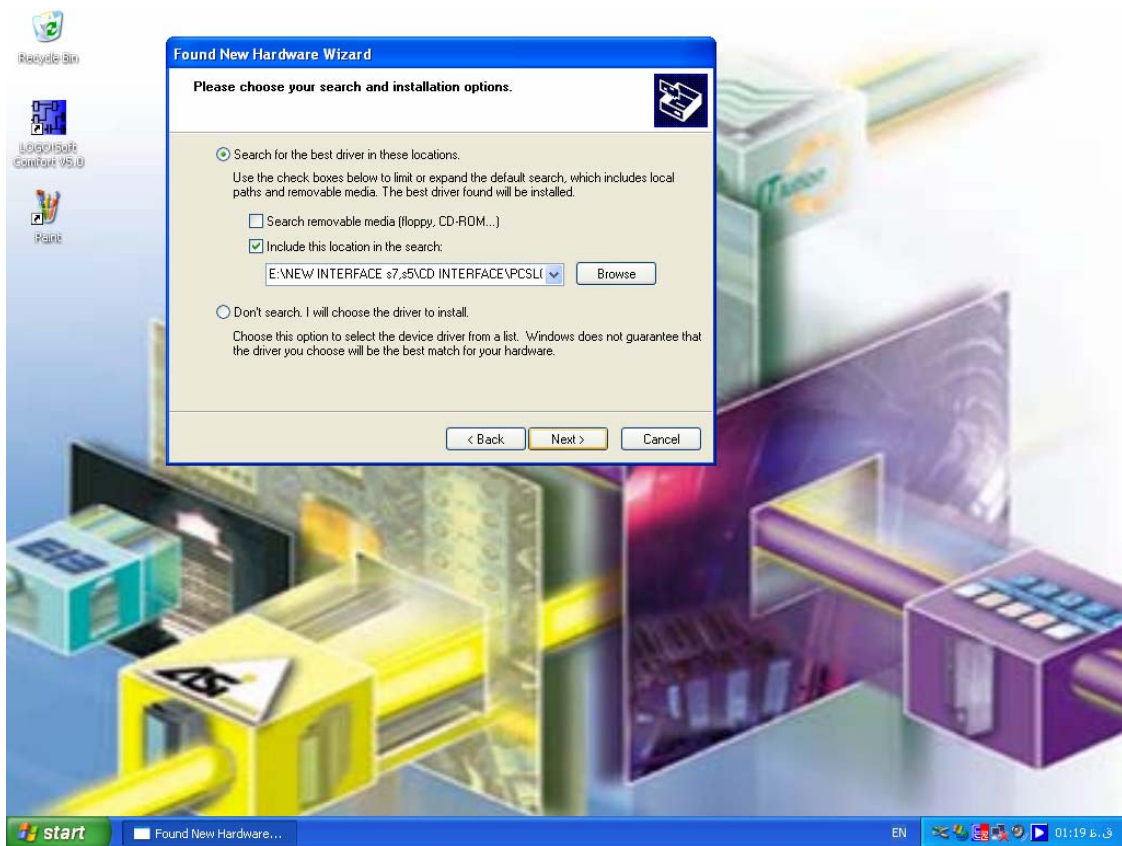

Select search for the best driver in these locations and select include this location in the search (select locations with Browse) then click next.

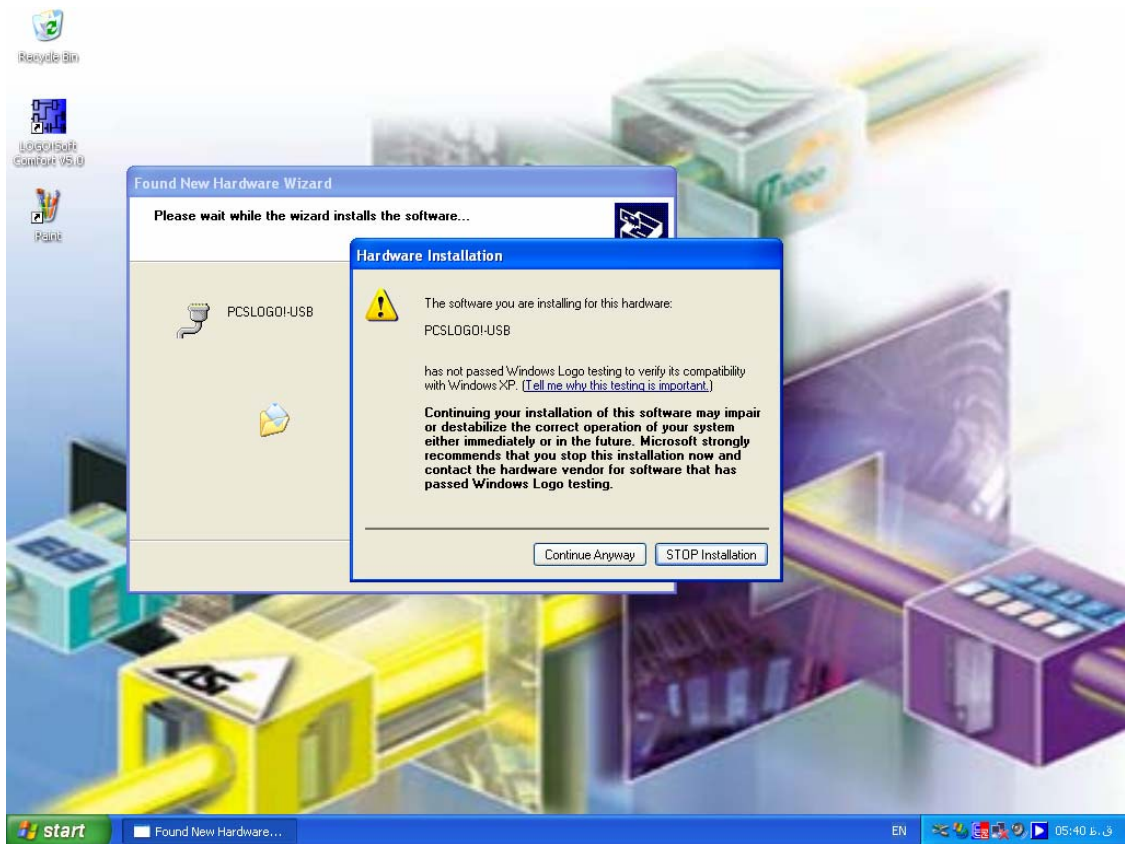


If follow window illustrate click on continue anyway.

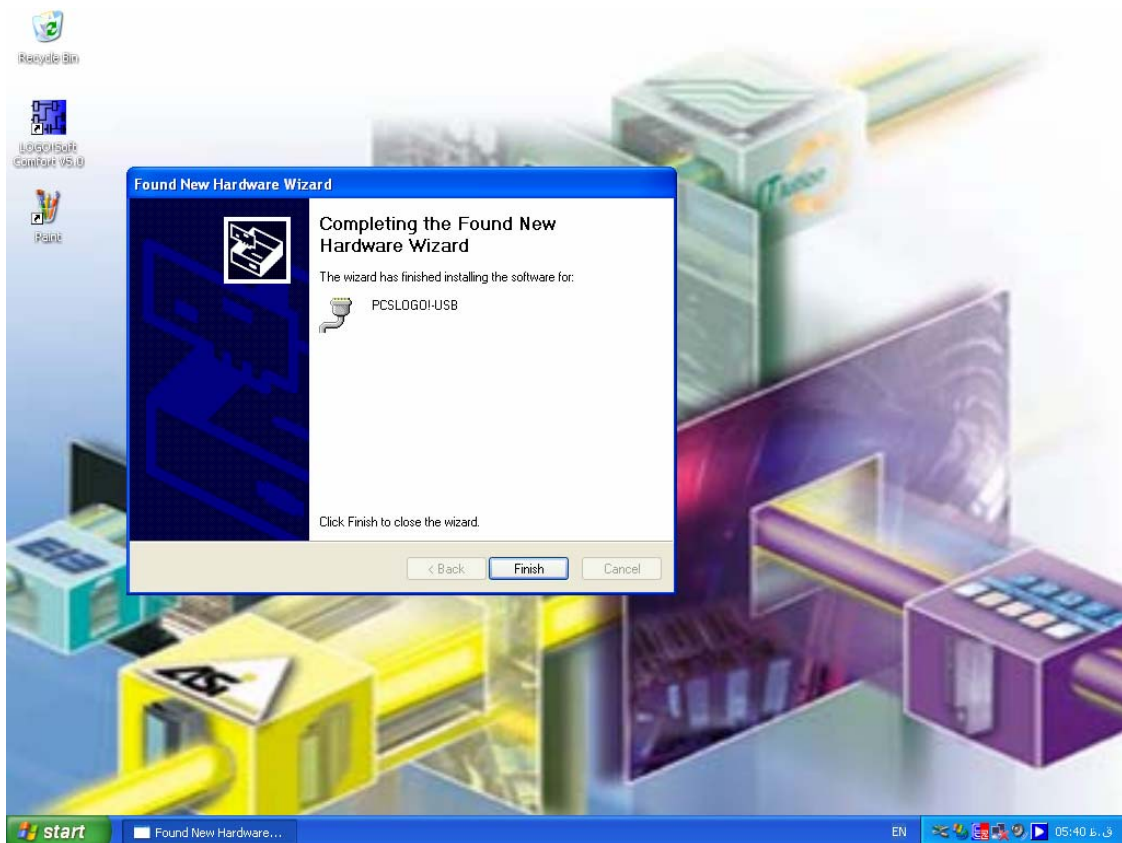



Click finish to finalize the driver installation.

For setting your comport parameter select
Start > control panel > system > device manager > ports (COM & LTP)

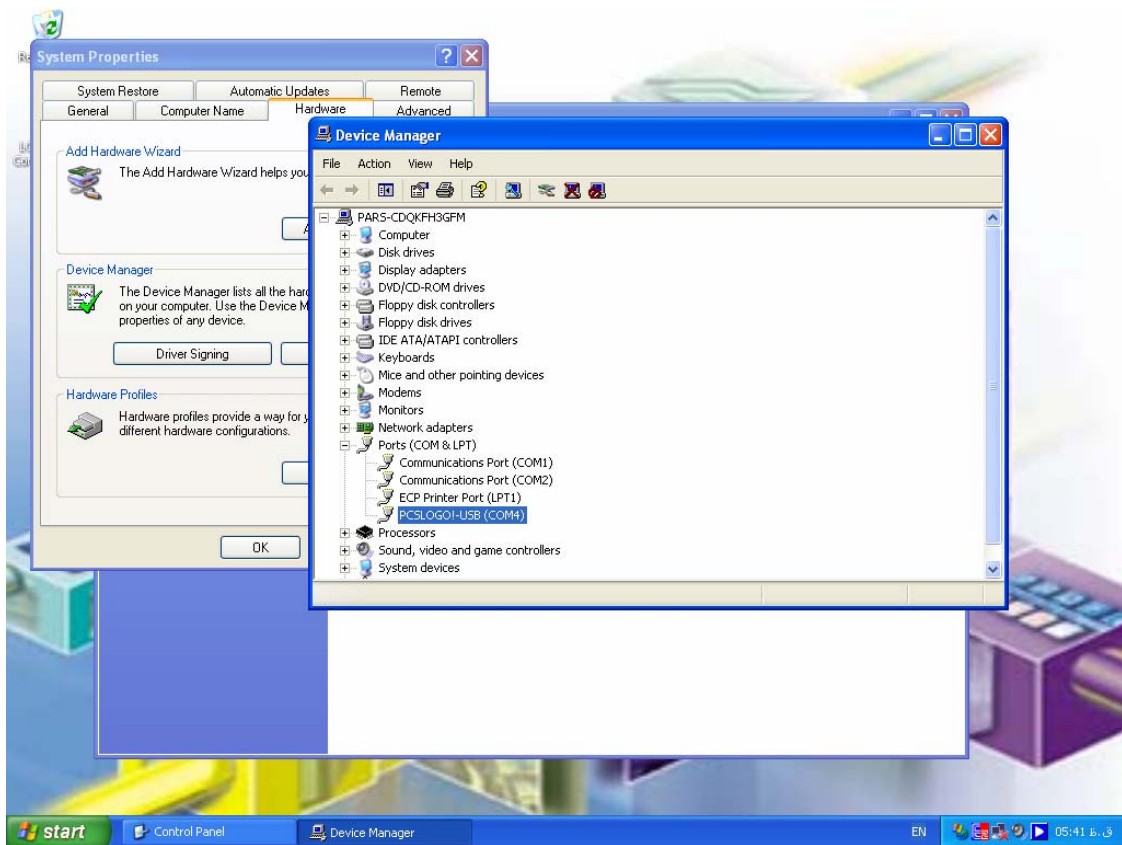


Then double click on PCSLOGO!-USB.

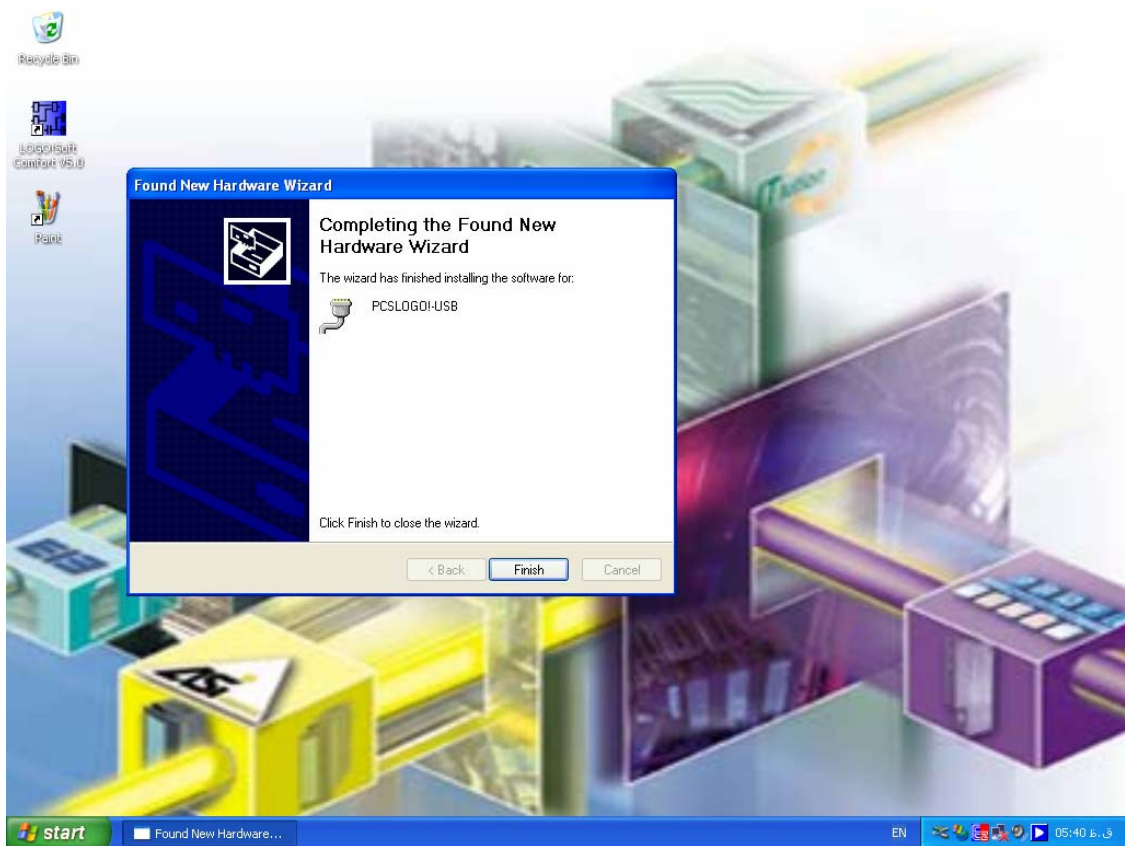

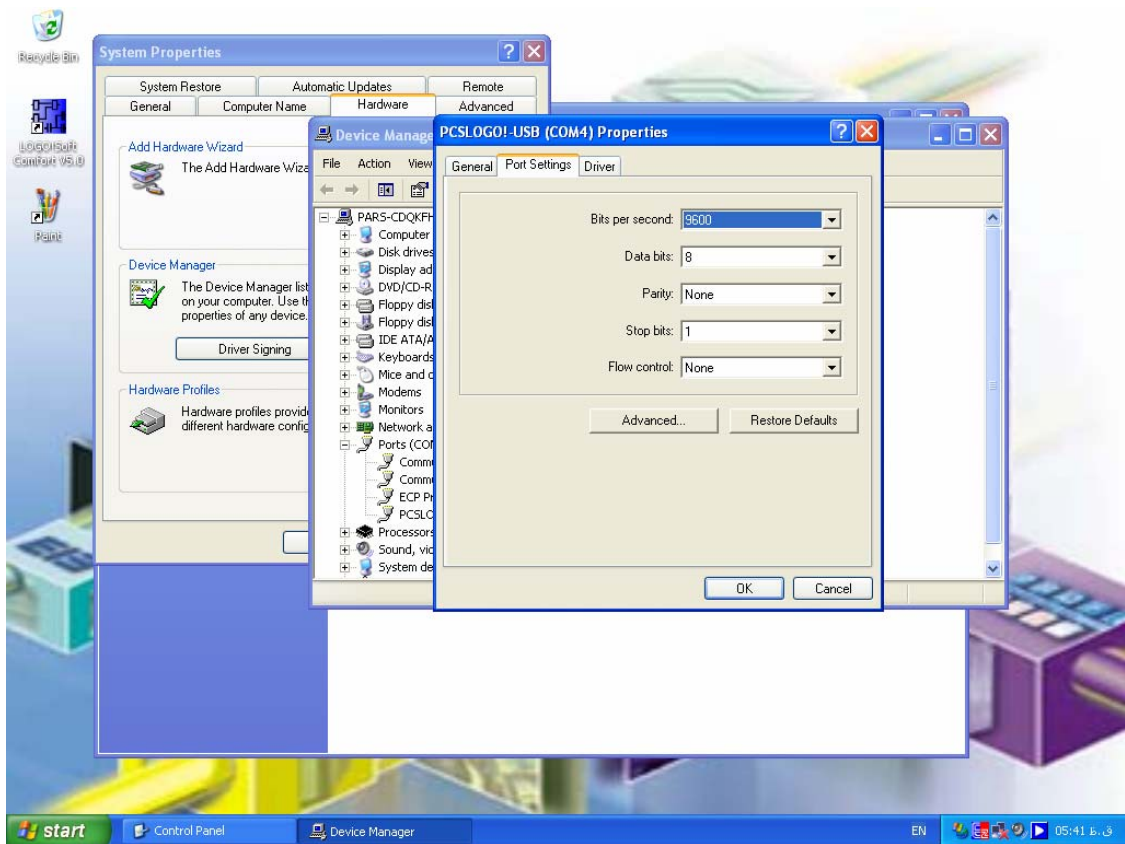


Click on advanced

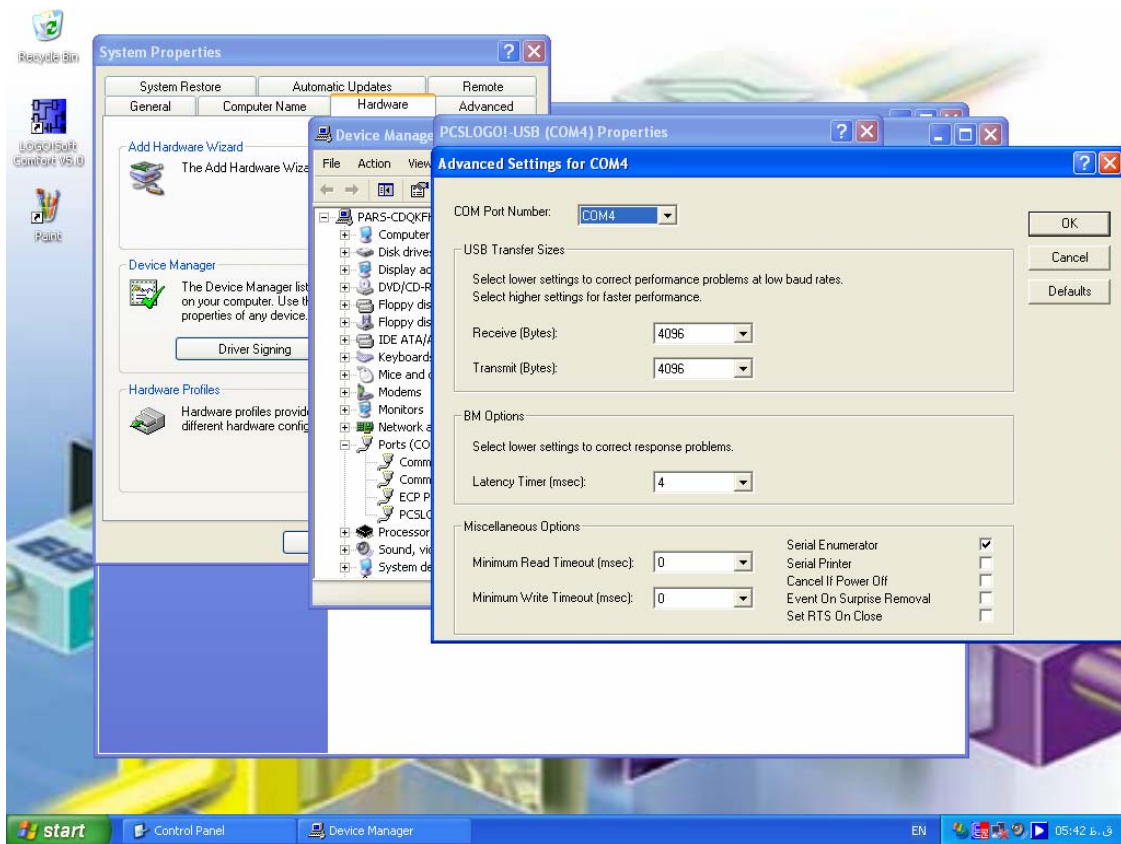


Select your COM port number then click OK.

RUN SOFTWARE LOGO!SOFT-COMFORT V5.0

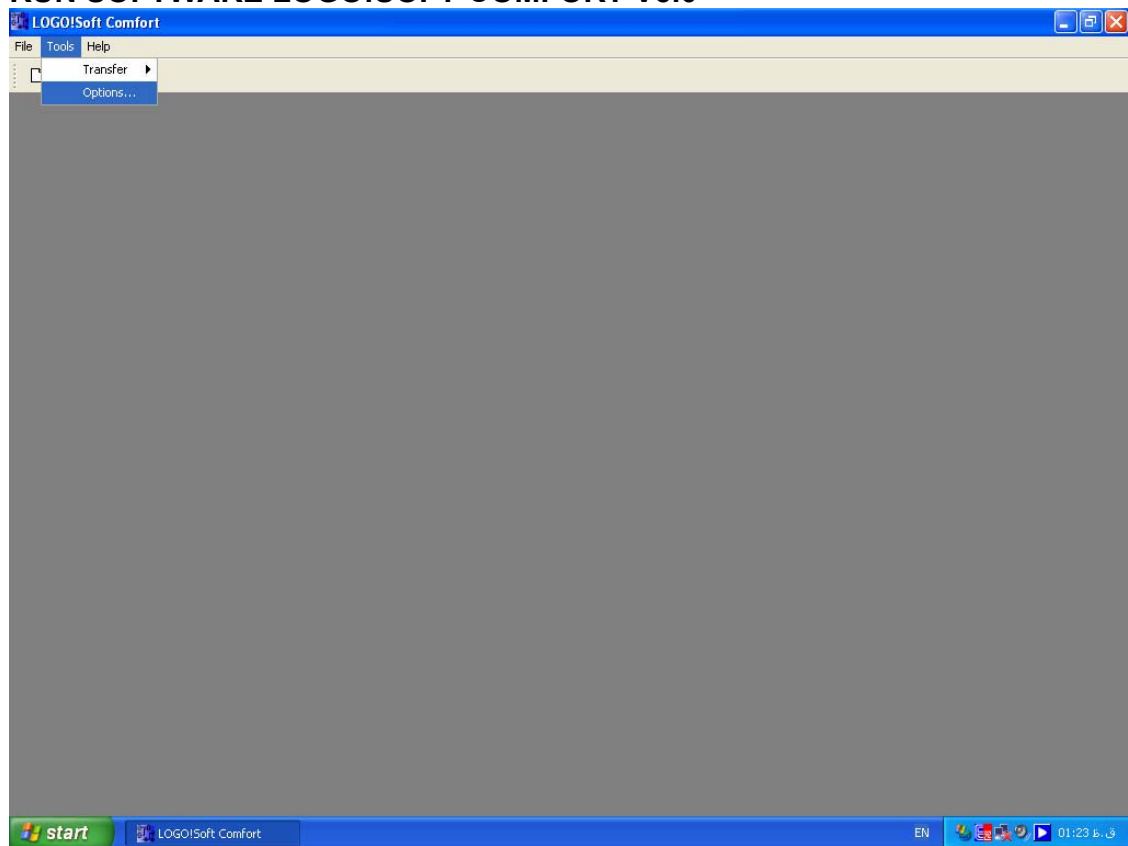


Select option > interface

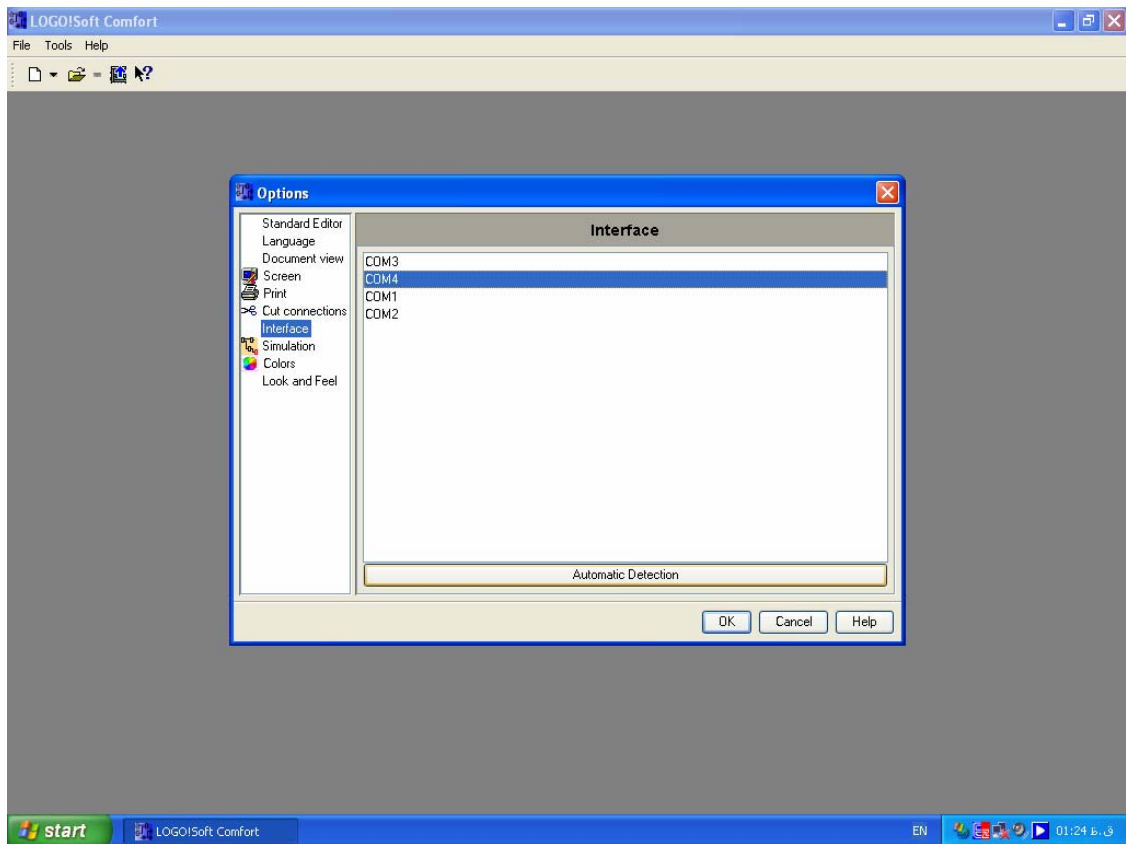


Select comport number and ok .

Test upload program to plc logo siemens:

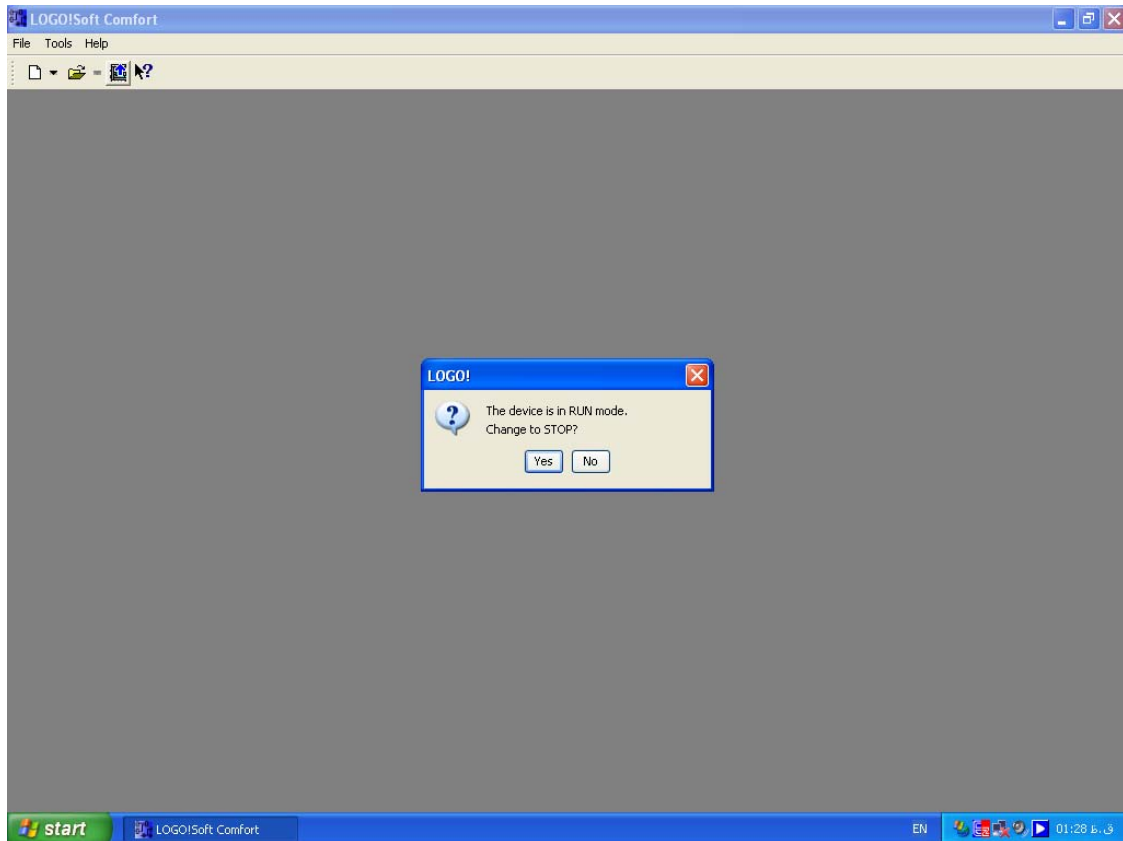


Select YES , start upload program.


UPLOAD program.

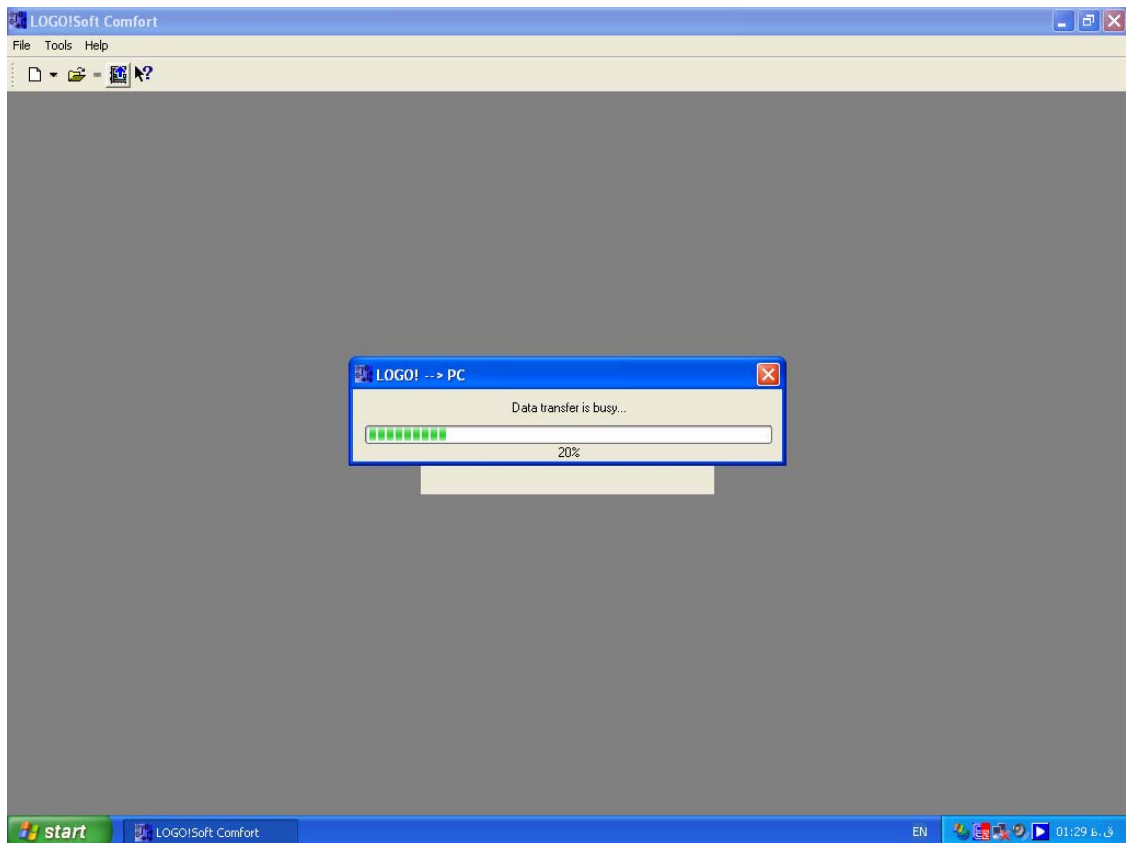

Test monitor program.

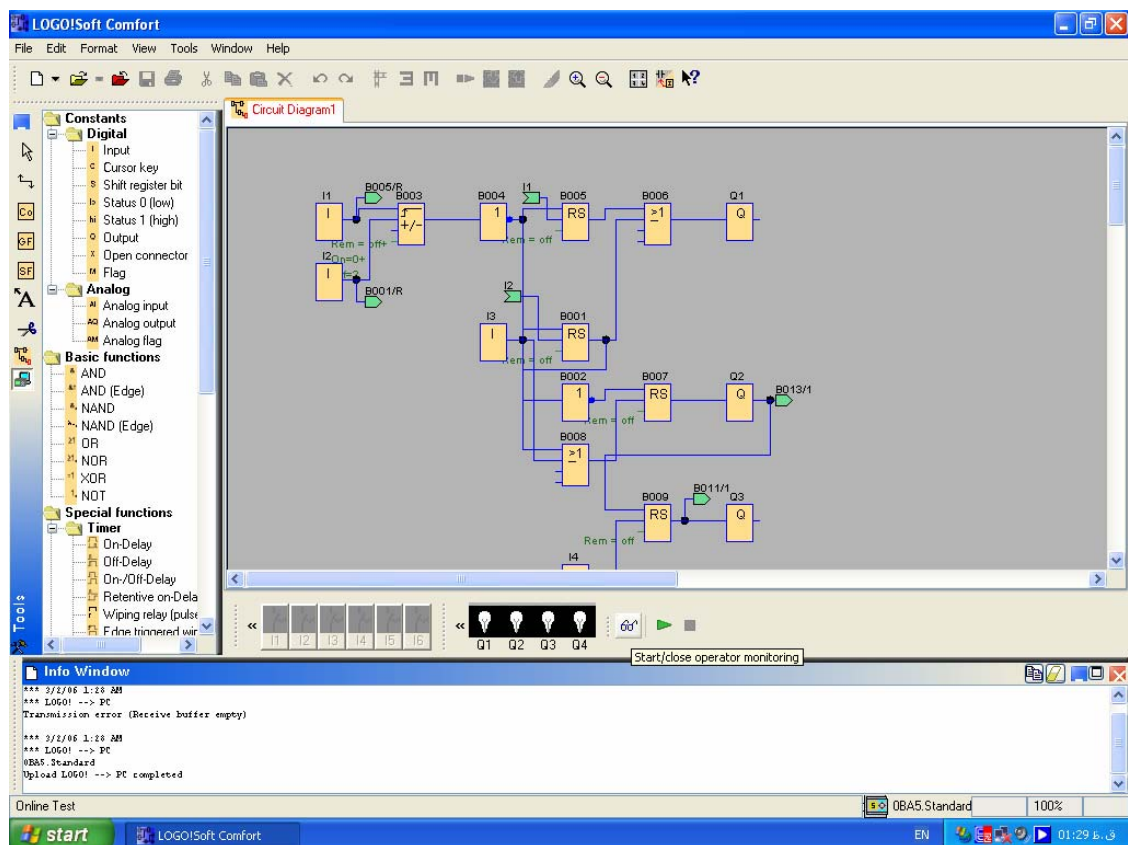


select Run program plc logo!.

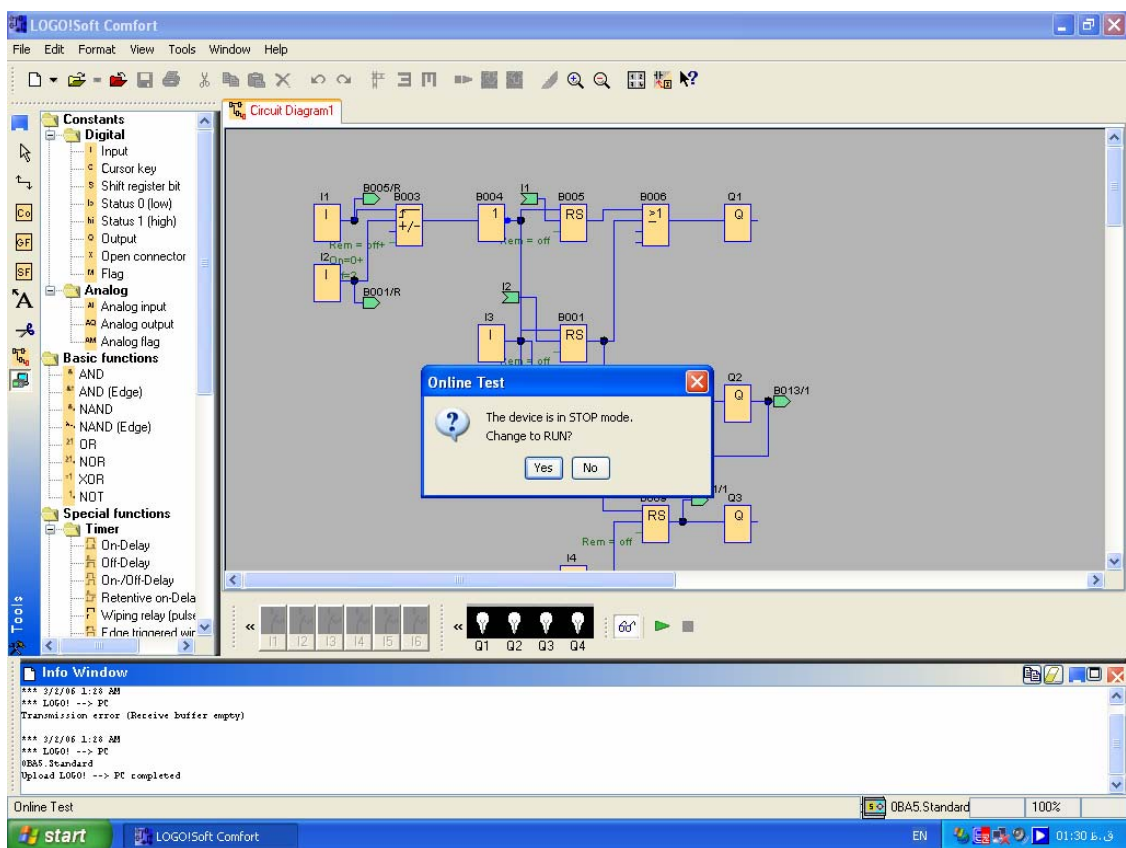

Select YES and monitor digital input and output plc logo! Siemens.

Monitor digital input and output and analog.

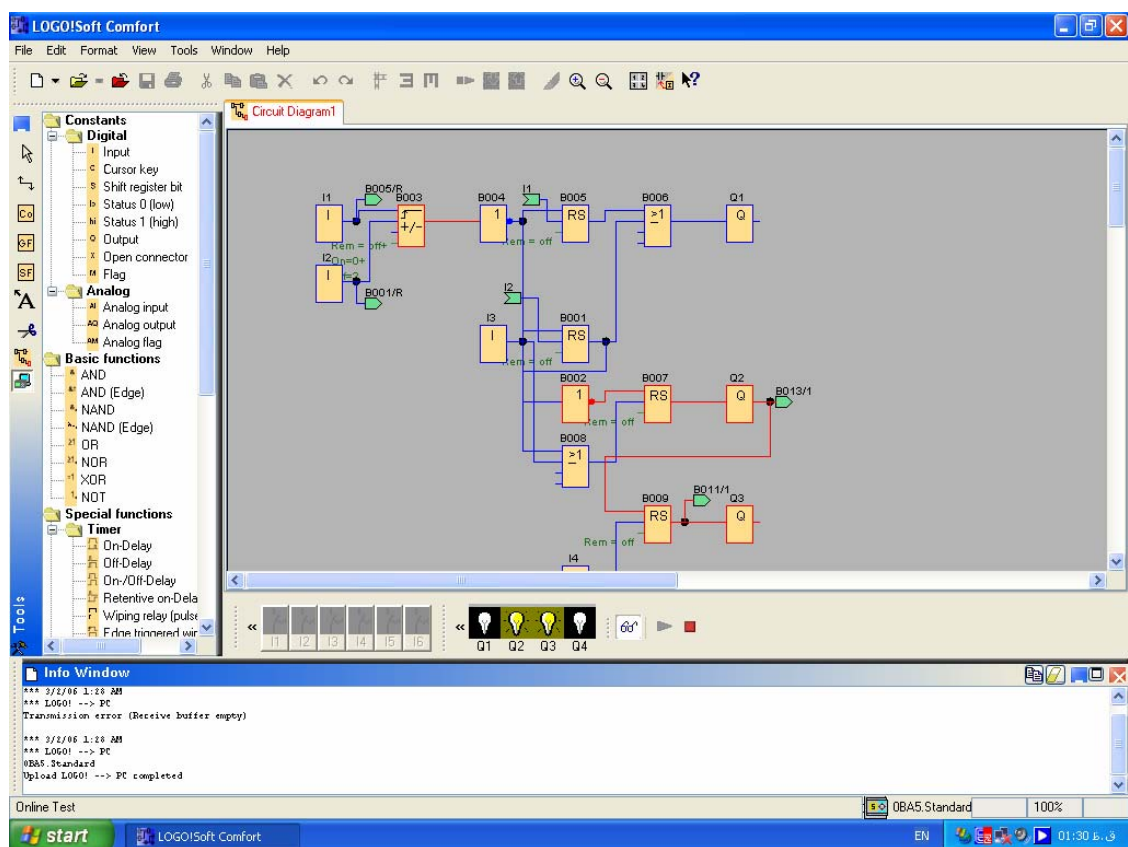

Note:

Use PCSLOGO!-USB whit standard device.



Warning:

Do not disconnect while circuit is live.

